

W RAWSON AVENUE (CTH BB)

RECONSTRUCTION




The Wisconsin Department of Transportation (WisDOT), in partnership with Milwaukee County, is scheduled to begin reconstructing W Rawson Avenue (CTH BB) from S 13th Street to S Howell Avenue in the City of Oak Creek. Construction is anticipated to begin in the spring of 2025, with a scheduled completion in the fall of 2025 and a final restoration in the spring of 2026.

STAY UP TO DATE!

For additional information, or if you would like to be added to the W Rawson Avenue distribution list to receive future project updates, please contact Athena Kuhl at akuhl@kapurinc.com

The following work is scheduled to take place as part of the project:

- Reconstruction of the existing pavement structure, curb and gutter, sidewalk, and storm sewer laterals within the project limits.
- Signal improvements at the intersections along W Rawson Avenue (CTH BB) including the upgrading of the existing signals at S 6th Street and S 10th Street.
- Installation of pedestrian crossings at signalized intersections along the corridor.
- Repairing the box culvert on W Rawson Avenue (CTH BB) just west of S Howell Avenue.

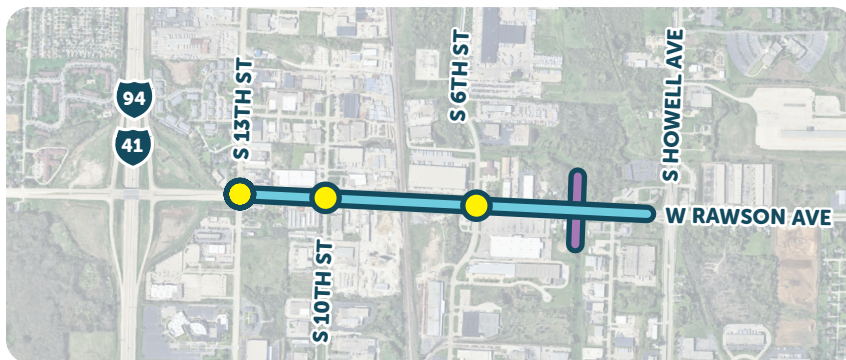

- Project Limits
- Traffic Signal Replacement
- Box Culvert Repair



CONTACT

Athena Kuhl

Public Involvement Specialist

akuhl@kapurinc.com • (414) 215-0379

CONSTRUCTION SEQUENCE

Stage 1:

- Construct crossovers on W Rawson Avenue (CTH BB) at the median of S 13th Street and just west of S Howell Avenue.
- Install a temporary traffic signal at the intersection of W Rawson Avenue (CTH BB) and S 6th Street.

Stage 2:

- Reconstruct eastbound W Rawson Avenue (CTH BB) and side streets south of W Rawson Avenue (CTH BB). Bidirectional traffic is scheduled to remain open on the existing westbound lanes. The following side streets south of W Rawson Avenue (CTH BB) are scheduled to close during this stage:
 - S 10th Street
 - S 1st Street

Stage 3:

- Reconstruct westbound W Rawson Avenue (CTH BB) and side streets north of W Rawson Avenue (CTH BB). Bidirectional traffic is scheduled to remain open on the newly paved eastbound lanes. The following side streets north of W Rawson Avenue (CTH BB) are scheduled to close during this stage:
 - S 10th Street

Stage 4:

- Remove crossovers on W Rawson Avenue (CTH BB). Bidirectional traffic is scheduled to switch to its respective lanes.

Stage 5:

- Restoration, signage, and pavement marking.